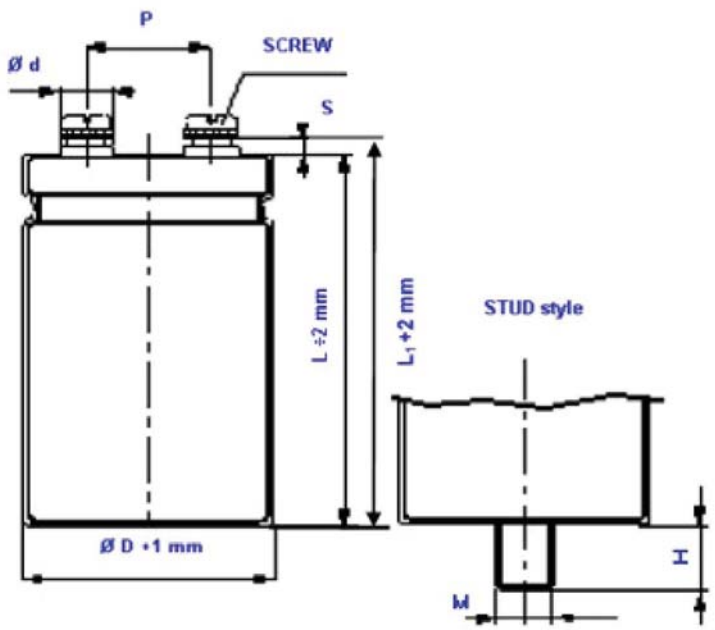


CAPACITOR SPECIFICATION

part number: **KI01016333__M0E060**
 Stud and insert style excluded [*]

Diagram of dimensions (unit = mm)						35x60
ØD	d	P	M	H	SCREW	
35	11	12.7	M8	12	5MA x 9.5	
51	18.5	22.2	M12	16	5MA x 9.5	
63	18.5	28.6	M12	16	5MA x 9.5	
76	18.5	31.8	M12	16	5MA x 9.5 6MA x 10	
90	18.5	31.8	M12	16	6MA x 10	
L₁	L ₁ = L + 2.5 mm L ₁ toll. -0+3mm		L ₁ = L + 4.5 mm L ₁ toll. -1+3mm			
S	M5= 5 -0+1mm from top of deck		M6= 7 -1+1mm from top of deck			
Marking Type - Identification Code Lot Rated capacitance (µF), Rated voltage (Vdc) Negative polarity: gold row <div style="background-color: green; color: white; padding: 2px; display: inline-block;">RoHS</div> Product compliant to Directive 2002/95/EC						

ELECTRICAL PARAMETERS

Nominal Capacitance	33000	µF at 100 Hz
[*] Tolerance Standard	M	= -20% +20% on request Q=-10%+30%
Temperature range	-40°C to 85°C
Rated Voltage / Surge Voltage	16/18	VDC
Max Tan δ	0.4	at 100 Hz
Typical ESR	15	mΩ at 100 Hz
Typical Impedance Z	13	mΩ at 10 kHz
Maximum Leakage Current	3.17	mA after 5 mins at 20°C
Maximum Ripple Current	9.2	A rms at 85°C
Useful Life	12000	hours at 85°C
Reference Standards	CECC 30.300 IEC 384.4 Long Life Grade	

When ambient temperature and ripple frequency are different from 85°C and 100 Hz, ripple current shall be multiplied by the following compensating factor:

FREQUENCY	FACTOR	TEMPERATURE	FACTOR
50 Hz	0.8	35°C	2.2
100 Hz	1.0	45°C	2.1
500 Hz	1.2	55°C	1.8
1000 Hz	1.3	65°C	1.6
>10 kHz	1.5	75°C	1.4
		85°C	1.0
		95°C	0.5

For further specifications: please consult our catalogue at www.kendeil-indfarad.com